

ADA LED SIGNAGE

LEDs:

Ultra-bright strips
UL Recognized components
12 volt, constant current

Average Current Draw:

0.67 amps per linear foot (12 v)


Power Consumption:

8 watts per linear foot

Panel Weight

~ 2.14 lbs per square foot

- Aluminum frame construction
- Anodized finish in black or satin silver
- Custom painted to PMS or color scales Matthews paint
- Variety of materials available for illuminance within ADA compliance
- Easy mounting using L or J brackets, Z clips or channel fasteners
- LED lifecycle of ~50,000 hours
- Minimal Maintenance
- Manufactured in the United States
- 12 month manufacturers warranty

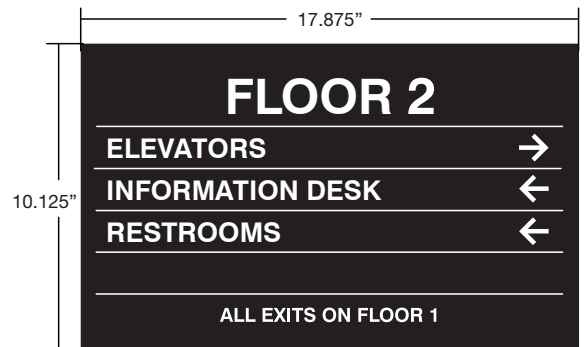


Key

White - Illuminated 1/8" semi translucent acrylic
Red- Illuminated vinyl under 1/8" semi translucent acrylic (other colors available upon request)

Our **ADA-compliant LED signage** has been designed for both your custom and ready-made needs. Our panels are made with technology that enhances luminance and delivers ultimate uniformity. LED panels can be lit from one or two edges and held in place with an f-channel frame allowing for more permanent display environments.

Extrusion
3.5 F-Channel

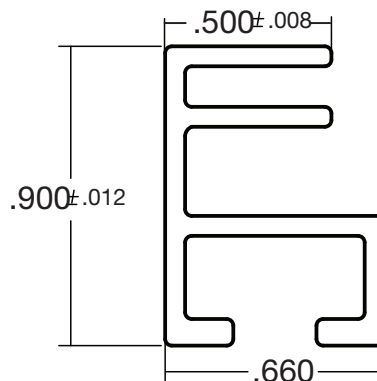

LED White Options:

- 6500k = Bright White
- 3500k = Warmer White

Mounting/Power Supply Options:

- Wall Mounted Plug-in - We can provide the power supply
- Wall Mounted with hidden cords- Requires electrical wiring routed throughout walls of building

Call
800-869-7800
for more
information